

Solenoid valves VZWD, directly actuated

FESTO



Solenoid valves VZWD, directly actuated

Key features and overview

FESTO

General



Directly actuated solenoid valves VZWD are mainly intended for applications with high pressure ranges and low flow rates. This type of valve switches the sealing

element directly via the solenoid system. The seal generally has to lift away from the seat against the effective operating pressure using just the drive. A closing spring

keeps the valve closed assisted by the pressure of the medium. The function is dependent on the seat size, the effective operating

pressure and the magnetic force. The differentiation from force pilot operated solenoid valves (VZWF) lies in the flow rate.

General

-  - Connecting thread
G $\frac{1}{4}$, G $\frac{3}{8}$
-  - Flow rate Kv
0.06 ... 0.4 m³/h

Areas of application

- Use in vacuum technology
- Venting gas and tank systems
- Safety shut-offs for burner controllers

Design





- Design insensitive to slight contamination of the media

Advantages

- Valves respond from 0 bar up to the max. operating pressure
- Excellent tightness

Solenoid valves VZWD, directly actuated

Key features and overview

Version	Type	Process valve connection	Nominal size (DN)	Operating pressure [bar]	→ Page/Internet				
Brass housing									
	VZWD-L-...	G1/4	1	0 ... 50	5				
			1.5	0 ... 30					
			2	0 ... 15					
			2.5	0 ... 8					
		G1/8	1	0 ... 50	5				
			1.5	0 ... 30					
			2	0 ... 15					
			Brass housing						
				VZWD-L-...		G1/4	1	0 ... 90	9
							1.5	0 ... 85	
2	0 ... 40								
2.5	0 ... 22								
3	0 ... 15								
4	0 ... 8								
5	0 ... 5								
6	0 ... 4								
G1/8	1	0 ... 90			9				
	1.5	0 ... 85							
	2	0 ... 40							
	2.5	0 ... 22							
	3	0 ... 15							
	4	0 ... 8							
	5	0 ... 5							
	6	0 ... 4							
	Stainless steel housing								
	VZWD-L-...-R1	G1/4			1	0 ... 90	14		
			1.5	0 ... 85					
			2	0 ... 40					
			2.5	0 ... 22					
			3	0 ... 15					
			4	0 ... 8					
			5	0 ... 5					
	VZWD-L-...-R1	G1/8	1	0 ... 90	14				
			1.5	0 ... 85					
			2	0 ... 40					
			2.5	0 ... 22					
			3	0 ... 15					
			4	0 ... 8					
			5	0 ... 5					
6	0 ... 4								

Solenoid valves VZWD, directly actuated

Type codes

VZWD - L - M22C - M - G18 - 15 - V - 2AP4 - 40 - R1

Type

VZWD	Solenoid valve, directly actuated
------	-----------------------------------

Type of directional control valve

L	In-line valve
---	---------------

Valve function

M22C	2/2-way valve, normally closed, mechanical reset
------	--

Reset method

M	Mechanical spring
---	-------------------

Process valve connection

G18	Thread G1/8
G14	Thread G1/4

Nominal size

10	1.0 mm
15	1.5 mm
20	2.0 mm
25	2.5 mm
30	3.0 mm
40	4.0 mm
50	5.0 mm
60	6.0 mm

Sealing material

V	FPM
---	-----

Nominal operating voltage

1	24 V DC
2A	110 V AC/50-60 Hz
3A	230 V AC/50-60 Hz

Electrical connection

P4	Plug socket, 3-pin
----	--------------------

Operating pressure

4	Max. 4 bar
5	Max. 5 bar
8	Max. 8 bar
15	Max. 15 bar
22	Max. 22 bar
30	Max. 30 bar
40	Max. 40 bar
50	Max. 50 bar
85	Max. 85 bar
90	Max. 90 bar

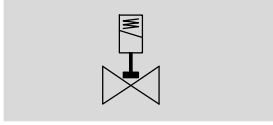
Corrosion protection


	Brass
R1	Stainless steel


Solenoid valves VZWD, directly actuated

Technical data – Brass housing, nominal pressure PN 50

Function



-  - Flow rate Kv
0.06 ... 0.16 m³/h

-  - Connecting thread
G¹/₄, G¹/₈



General technical data		1.0	1.5	2.0	2.5
Nominal size (DN)		1.0	1.5	2.0	2.5
Valve function		2/2-way, single solenoid, closed			
Design		Directly actuated poppet valve			
Type of mounting		In-line installation			
Actuation type		Electric			
Reset method		Mechanical spring			
Direction of flow		Non-reversible			
Type of control		Direct			
Manual override		None			
Mounting position		Any			
Sealing principle		Soft			
Max. viscosity	[mm ² /s]	22			
Protection class		IP65			

Operating and environmental conditions		1.0	1.5	2.0	2.5
Nominal size (DN)		1.0	1.5	2.0	2.5
Standard nominal flow rate	[l/min]	60	95	140	170
Flow rate Kv	[m ³ /h]	0.06	0.09	0.13	0.16
Process valve nominal pressure (PN)		50			
Process valve operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:4:4]			
		Inert gases			
		Mineral oil			
		Neutral liquids			
		Water			
		Further media upon request			
Pressure differential	[bar]	0			
Ambient temperature	[°C]	-10 ... +35 °C			
Temperature of medium	[°C]	-10 ... +80 °C			
Leak rate to EN 12266-1		A			
Corrosion resistance class CRC ¹⁾		1			

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

Low corrosion stress. For dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Solenoid valves VZWD, directly actuated

FESTO

Technical data – Brass housing, nominal pressure PN 50

Electrical data			
	VZWD- ... 1	VZWD- ... 2A	VZWD- ... 3A
Electrical connection	Plug to EN 175301-803 type A, square design		
CE marking	–	73/23/EEC	73/23/EEC
Insulation class	H	F	F
Duty cycle	[%] 100		
Permissible voltage fluctuations	[%] ±10		
Switching time on	[ms] 25		
Switching time off	[ms] 10		
Coil characteristics			
Direct current DC	[V] 24	–	–
Alternating current AC	[V] –	110	230
Power consumption	[W] 6.8	–	–
Switching power	[VA] –	10.5	10.5
Holding power	[VA] –	8	7.6
	[Hz] –	50, 60	50, 60

Materials		
Solenoid valves		Material number
1 Housing	High-alloy stainless steel	1.4305
	Brass	CW614N
2 Seals	FPM	
– Note on materials	Contains PWIS (paint-wetting impairment substances), RoHS-compliant	

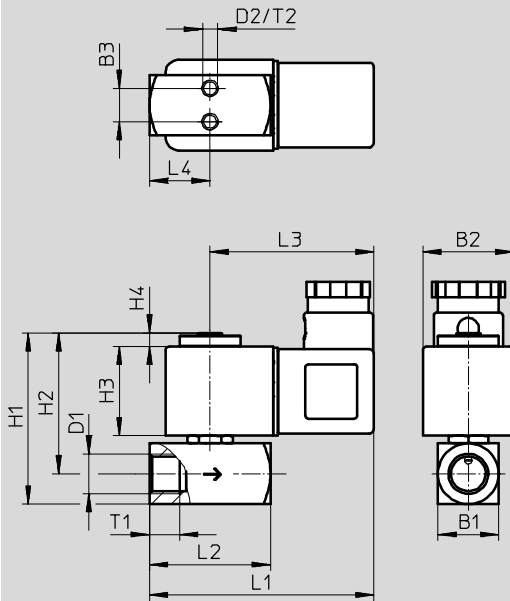
Solenoid valves VZWD, directly actuated

Technical data – Brass housing, nominal pressure PN 50

Dimensions

Download CAD data → www.festo.com

Milled brass housing





Type	B1	B2	B3	D1	D2	H1	H2	H3	H4	L1	L2	L3	L4	L5	T1	T2
VZWD-...-G1/8-10-...-50	15	30	8	G1/8	M3	52	44	30	5	70	32	54	16	-	8	4.5
VZWD-...-G1/8-15-...-30																
VZWD-...-G1/8-20-...-15																
VZWD-...-G1/4-10-...-50	20	30	11	G1/4	M5	57	47	30	5	74	40	54	20	-	10	5.5
VZWD-...-G1/4-15-...-30																
VZWD-...-G1/4-20-...-15																
VZWD-...-G1/4-25-...-8																

Solenoid valves VZWD, directly actuated

FESTO

Technical data – Brass housing, nominal pressure PN 50

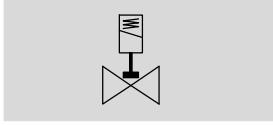
Ordering data						
	Process valve connection	Nominal size	Operating pressure	Product weight	Brass housing	
		DN	[bar]	[g]	Part No.	Type
	G $\frac{1}{4}$	1	0 ... 50	350	1491906	VZWD-L-M22C-M-G14-10-V-2AP4-50
					1491984	VZWD-L-M22C-M-G14-10-V-3AP4-50
					1491828	VZWD-L-M22C-M-G14-10-V-1P4-50
		1.5	0 ... 30	350	1491907	VZWD-L-M22C-M-G14-15-V-2AP4-30
					1491985	VZWD-L-M22C-M-G14-15-V-3AP4-30
					1491829	VZWD-L-M22C-M-G14-15-V-1P4-30
	2	0 ... 15	350	1491908	VZWD-L-M22C-M-G14-20-V-2AP4-15	
				1491986	VZWD-L-M22C-M-G14-20-V-3AP4-15	
				1491830	VZWD-L-M22C-M-G14-20-V-1P4-15	
	2.5	0 ... 8	350	1491909	VZWD-L-M22C-M-G14-25-V-2AP4-8	
				1491987	VZWD-L-M22C-M-G14-25-V-3AP4-8	
				1491831	VZWD-L-M22C-M-G14-25-V-1P4-8	

Ordering data						
	Process valve connection	Nominal size	Operating pressure	Product weight	Brass housing	
		DN	[bar]	[g]	Part No.	Type
	G $\frac{1}{8}$	1	0 ... 50	300	1491903	VZWD-L-M22C-M-G18-10-V-2AP4-50
					1491981	VZWD-L-M22C-M-G18-10-V-3AP4-50
					1491825	VZWD-L-M22C-M-G18-10-V-1P4-50
		1.5	0 ... 30	300	1491904	VZWD-L-M22C-M-G18-15-V-2AP4-30
					1491982	VZWD-L-M22C-M-G18-15-V-3AP4-30
					1491826	VZWD-L-M22C-M-G18-15-V-1P4-30
	2	0 ... 15	300	1491905	VZWD-L-M22C-M-G18-20-V-2AP4-15	
				1491983	VZWD-L-M22C-M-G18-20-V-3AP4-15	
				1491827	VZWD-L-M22C-M-G18-20-V-1P4-15	

Solenoid valves VZWD, directly actuated

Technical data – Brass housing, nominal pressure PN 100

Function



- - Flow rate Kv
0.06 ... 0.4 m³/h

Nominal size (DN)
1.0 ... 6.0 mm

- - Connecting thread
G¹/₄, G¹/₈



General technical data								
Nominal size (DN)	1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0
Valve function	2/2-way, single solenoid, closed							
Design	Directly actuated poppet valve							
Type of mounting	In-line installation							
Actuation type	Electric							
Reset method	Mechanical spring							
Direction of flow	Non-reversible							
Type of control	Direct							
Manual override	None							
Mounting position	Any							
Sealing principle	Soft							
Max. viscosity [mm ² /s]	22							
Protection class	IP65							

Operating and environmental conditions								
Nominal size (DN)	1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0
Standard nominal flow rate [l/min]	60	95	140	170	210	310	375	430
Flow rate Kv [m ³ /h]	0.06	0.09	0.13	0.16	0.2	0.3	0.35	0.4
Process valve nominal pressure (PN)	100							
Pressure differential [bar]	0							
Process valve operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]							
	Inert gases							
	Mineral oil							
	Neutral liquids							
	Water							
	Further media upon request							
Ambient temperature [°C]	-10 ... +35 °C							
Temperature of medium [°C]	-10 ... +80 °C							
Leak rate to EN 12266-1	A							
Corrosion resistance class CRC ¹⁾	1							

1) Corrosion resistance class CRC 1 to Festo standard FN 940070
Low corrosion stress. For dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Solenoid valves VZWD, directly actuated

FESTO

Technical data – Brass housing, nominal pressure PN 100

Electrical data			
	VZWD- ... 1	VZWD- ... 2A	VZWD- ... 3A
Electrical connection	Plug to EN 175301-803 type A, square design		
CE marking	–	73/23/EEC	73/23/EEC
Insulation class	H	F	F
Duty cycle	[%] 100		
Permissible voltage fluctuations	[%] ±10		
Switching time on	[ms] 20		
Switching time off	[ms] 18		
Coil characteristics			
Direct current DC	[V] 24	–	–
Alternating current AC	[V] –	110	230
Power consumption	[W] 11	–	–
Switching power	[VA] –	19	18
Holding power	[VA] –	16	15
	[Hz] –	50, 60	50, 60

Materials		
Solenoid valves		Material number
1 Housing	High-alloy stainless steel	1.4305
	Brass	CW614N
2 Seals	FPM	
– Note on materials	Contains PWIS (paint-wetting impairment substances), RoHS-compliant	

Solenoid valves VZWD, directly actuated

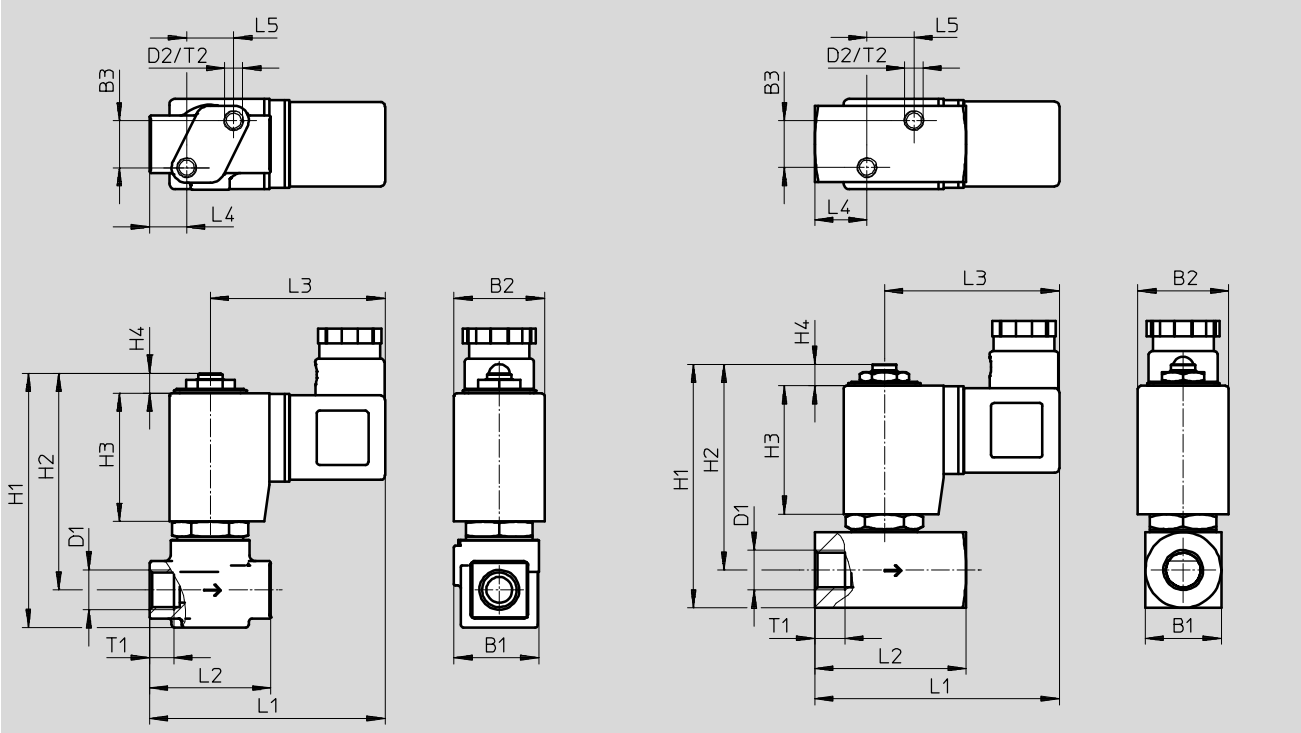
Technical data – Brass housing, nominal pressure PN 100

Dimensions

Download CAD data → www.festo.com

Die-cast brass housing

Milled brass housing





Type	B1	B2	B3	D1	D2	H1	H2	H3	H4	L1	L2	L3	L4	L5	T1	T2
VZWD-...-G1/8-10-...-90	28	30	15.5	G1/8	M6	84	72	42.5	6.5	78	40	58	12	15.5	8	6
VZWD-...-G1/8-15-...-85																
VZWD-...-G1/8-20-...-40																
VZWD-...-G1/8-25-...-22																
VZWD-...-G1/8-30-...-15																
VZWD-...-G1/8-40-...-8																
VZWD-...-G1/4-10-...-90	28	30	15.5	G1/4	M6	84	72	42.5	6.5	78	40	58	12	15.5	10	6
VZWD-...-G1/4-15-...-85																
VZWD-...-G1/4-20-...-40																
VZWD-...-G1/4-25-...-22																
VZWD-...-G1/4-30-...-15																
VZWD-...-G1/4-40-...-8																
VZWD-...-G1/8-50-...-5	25	30	15.5	G1/8	M6	81	68	42.5	7	78	40	58	12	15.5	8	6
VZWD-...-G1/8-60-...-4																
VZWD-...-G1/4-50-...-5	25	30	15.5	G1/4	M6	81	68	42.5	7	85	50	58	17	15.5	10	6
VZWD-...-G1/4-60-...-4																

Solenoid valves VZWD, directly actuated

FESTO


Technical data – Brass housing, nominal pressure PN 100


Ordering data						
	Process valve connection	Nominal size	Operating pressure	Product weight	Brass housing	
		DN	[bar]	[g]	Part No.	Type
	G $\frac{1}{4}$	1	0 ... 90	550	1491918	VZWD-L-M22C-M-G14-10-V-2AP4-90
					1491996	VZWD-L-M22C-M-G14-10-V-3AP4-90
					1491840	VZWD-L-M22C-M-G14-10-V-1P4-90
		1.5	0 ... 85	550	1491919	VZWD-L-M22C-M-G14-15-V-2AP4-85
					1491997	VZWD-L-M22C-M-G14-15-V-3AP4-85
					1491841	VZWD-L-M22C-M-G14-15-V-1P4-85
		2	0 ... 40	550	1491920	VZWD-L-M22C-M-G14-20-V-2AP4-40
					1491998	VZWD-L-M22C-M-G14-20-V-3AP4-40
					1491842	VZWD-L-M22C-M-G14-20-V-1P4-40
	2.5	0 ... 22	550	1491921	VZWD-L-M22C-M-G14-25-V-2AP4-22	
				1491999	VZWD-L-M22C-M-G14-25-V-3AP4-22	
				1491843	VZWD-L-M22C-M-G14-25-V-1P4-22	
	3	0 ... 15	550	1491922	VZWD-L-M22C-M-G14-30-V-2AP4-15	
				1492000	VZWD-L-M22C-M-G14-30-V-3AP4-15	
				1491844	VZWD-L-M22C-M-G14-30-V-1P4-15	
	4	0 ... 8	550	1491923	VZWD-L-M22C-M-G14-40-V-2AP4-8	
				1492001	VZWD-L-M22C-M-G14-40-V-3AP4-8	
				1491845	VZWD-L-M22C-M-G14-40-V-1P4-8	

Ordering data						
	Process valve connection	Nominal size	Operating pressure	Product weight	Brass housing	
		DN	[bar]	[g]	Part No.	Type
	G $\frac{1}{4}$	5	0 ... 5	600	1491924	VZWD-L-M22C-M-G14-50-V-2AP4-5
					1492002	VZWD-L-M22C-M-G14-50-V-3AP4-5
					1491846	VZWD-L-M22C-M-G14-50-V-1P4-5
	6	0 ... 4	600	1491925	VZWD-L-M22C-M-G14-60-V-2AP4-4	
				1492003	VZWD-L-M22C-M-G14-60-V-3AP4-4	
				1491847	VZWD-L-M22C-M-G14-60-V-1P4-4	

Solenoid valves VZWD, directly actuated

Technical data – Brass housing, nominal pressure PN 100

Ordering data						
	Process valve connection	Nominal size	Operating pressure	Product weight	Brass housing	
		DN	[bar]	[g]	Part No.	Type
	G $\frac{1}{8}$	1	0 ... 90	550	1491910	VZWD-L-M22C-M-G18-10-V-2AP4-90
					1491988	VZWD-L-M22C-M-G18-10-V-3AP4-90
					1491832	VZWD-L-M22C-M-G18-10-V-1P4-90
		1.5	0 ... 85	550	1491911	VZWD-L-M22C-M-G18-15-V-2AP4-85
					1491989	VZWD-L-M22C-M-G18-15-V-3AP4-85
					1491833	VZWD-L-M22C-M-G18-15-V-1P4-85
		2	0 ... 40	550	1491912	VZWD-L-M22C-M-G18-20-V-2AP4-40
					1491990	VZWD-L-M22C-M-G18-20-V-3AP4-40
					1491834	VZWD-L-M22C-M-G18-20-V-1P4-40
		2.5	0 ... 22	550	1491913	VZWD-L-M22C-M-G18-25-V-2AP4-22
					1491991	VZWD-L-M22C-M-G18-25-V-3AP4-22
					1491835	VZWD-L-M22C-M-G18-25-V-1P4-22
		3	0 ... 15	550	1491914	VZWD-L-M22C-M-G18-30-V-2AP4-15
					1491992	VZWD-L-M22C-M-G18-30-V-3AP4-15
					1491836	VZWD-L-M22C-M-G18-30-V-1P4-15
		4	0 ... 8	550	1491915	VZWD-L-M22C-M-G18-40-V-2AP4-8
					1491993	VZWD-L-M22C-M-G18-40-V-3AP4-8
					1491837	VZWD-L-M22C-M-G18-40-V-1P4-8

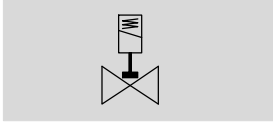
Ordering data						
	Process valve connection	Nominal size	Operating pressure	Product weight	Brass housing	
		DN	[bar]	[g]	Part No.	Type
	G $\frac{1}{8}$	5	0 ... 5	600	1491916	VZWD-L-M22C-M-G18-50-V-2AP4-5
					1491994	VZWD-L-M22C-M-G18-50-V-3AP4-5
					1491838	VZWD-L-M22C-M-G18-50-V-1P4-5
		6	0 ... 4	600	1491917	VZWD-L-M22C-M-G18-60-V-2AP4-4
					1491995	VZWD-L-M22C-M-G18-60-V-3AP4-4
					1491839	VZWD-L-M22C-M-G18-60-V-1P4-4


Solenoid valves VZWD, directly actuated


Technical data – Stainless steel housing, nominal pressure PN 100

FESTO

Function



-  - Flow rate Kv
0.06 ... 0.4 m³/h

-  - Connecting thread
G¹/₄, G¹/₈



General technical data								
Nominal size (DN)	1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0
Valve function	2/2-way, single solenoid, closed							
Design	Directly actuated poppet valve							
Type of mounting	In-line installation							
Actuation type	Electric							
Reset method	Mechanical spring							
Type of control	Direct							
Manual override	None							
Mounting position	Any							
Sealing principle	Soft							
Direction of flow	Non-reversible							
Max. viscosity [mm ² /s]	22							
Protection class	IP65							

Operating and environmental conditions								
Nominal size (DN)	1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0
Standard nominal flow rate [l/min]	60	95	140	170	210	310	375	430
Flow rate Kv [m ³ /h]	0.06	0.09	0.13	0.16	0.2	0.3	0.35	0.4
Process valve nominal pressure (PN)	100							
Process valve operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]							
	Inert gases							
	Mineral oil							
	Neutral liquids							
	Water							
	Further media upon request							
Pressure differential [bar]	0							
Ambient temperature [°C]	-10 ... +35 °C							
Temperature of medium [°C]	-10 ... +80 °C							
Leak rate to EN 12266-1	A							
Corrosion resistance class CRC ¹⁾	3							

1) Corrosion resistance class CRC 3 to Festo standard FN 940070

High corrosion stress. Outdoor exposure under moderate corrosive conditions. External visible parts with primarily functional requirements for the surface and which are in direct contact with a normal industrial environment.

Solenoid valves VZWD, directly actuated

Technical data – Stainless steel housing, nominal pressure PN 100

Electrical data				
		VZWD- ... 1	VZWD- ... 2A	VZWD- ... 3A
Electrical connection		Plug to EN 175301-803 type A, square design		
CE marking		–	73/23/EEC	73/23/EEC
Insulation class		H	F	F
Duty cycle	[%]	100		
Permissible voltage fluctuations	[%]	±10		
Switching time on	[ms]	20		
Switching time off	[ms]	18		
Coil characteristics				
Direct current DC	[V]	24	–	–
Alternating current AC	[V]	–	110	230
Power consumption	VACS-H0P [W]	6.8	–	–
solenoid coil type	VACS-H1P [W]	11	–	–
Switching power	VACS-H0P [VA]	–	10.5	10.5
solenoid coil type	VACS-H1P [VA]	–	19	18
Holding power	VACS-H0P [VA]	–	8	7.6
solenoid coil type	VACS-H1P [VA]	–	16	15
	[Hz]	–	50, 60	50, 60

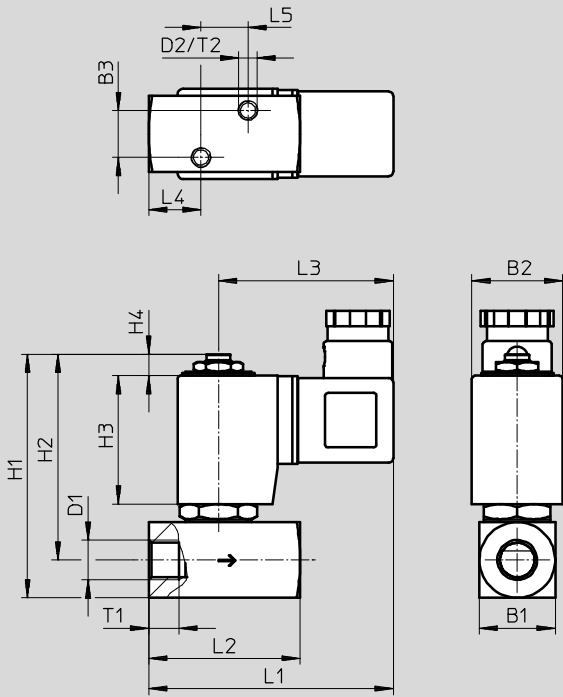
Materials			
Solenoid valves		Material number	
1	Housing	High-alloy stainless steel	1.4305
2	Seals	FPM	
–	Note on materials	Contains PWIS (paint-wetting impairment substances), RoHS-compliant	

Solenoid valves VZWD, directly actuated

Technical data – Stainless steel housing, nominal pressure PN 100

Dimensions


Download CAD data → www.festo.com



Type	B1	B2	B3	D1	D2	H1	H2	H3	H4	L1	L2	L3	L4	L5	T1	T2
VZWD-...-G1/8-50-...-5	25	30	15.5	G1/8	M6	81	68	42.5	7	78	40	58	12	15.5	8	6
VZWD-...-G1/8-60-...-4																
VZWD-...-G1/4-50-...-5	25	30	15.5	G1/4	M6	81	68	42.5	7	85	50	58	17	15.5	10	6
VZWD-...-G1/4-60-...-4																


Solenoid valves VZWD, directly actuated

Technical data – Stainless steel housing, nominal pressure PN 100

Ordering data – Solenoid valve VZWD						
	Process valve connection	Nominal size DN	Operating pressure [bar]	Product weight [g]	Stainless steel casting housing	
					Part No.	Type
	G $\frac{1}{4}$	1	0 ... 90	650	1491934	VZWD-L-M22C-M-G14-10-V-2AP4-90-R1
					1492012	VZWD-L-M22C-M-G14-10-V-3AP4-90-R1
					1491856	VZWD-L-M22C-M-G14-10-V-1P4-90-R1
		1.5	0 ... 85	650	1491935	VZWD-L-M22C-M-G14-15-V-2AP4-85-R1
					1492013	VZWD-L-M22C-M-G14-15-V-3AP4-85-R1
					1491857	VZWD-L-M22C-M-G14-10-V-1P4-90-R1
		2	0 ... 40	650	1491936	VZWD-L-M22C-M-G14-20-V-2AP4-40-R1
					1492014	VZWD-L-M22C-M-G14-20-V-3AP4-40-R1
					1491858	VZWD-L-M22C-M-G14-20-V-1P4-40-R1
		2.5	0 ... 22	650	1491937	VZWD-L-M22C-M-G14-25-V-2AP4-22-R1
					1492015	VZWD-L-M22C-M-G14-25-V-3AP4-22-R1
					1491859	VZWD-L-M22C-M-G14-25-V-1P4-22-R1
		3	0 ... 15	650	1491938	VZWD-L-M22C-M-G14-30-V-2AP4-15-R1
					1492016	VZWD-L-M22C-M-G14-30-V-3AP4-15-R1
					1491860	VZWD-L-M22C-M-G14-30-V-1P4-15-R1
		4	0 ... 8	650	1491939	VZWD-L-M22C-M-G14-40-V-2AP4-8-R1
					1492017	VZWD-L-M22C-M-G14-40-V-3AP4-8-R1
					1491861	VZWD-L-M22C-M-G14-40-V-1P4-8-R1
		5	0 ... 5	650	1491940	VZWD-L-M22C-M-G14-50-V-2AP4-5-R1
					1492018	VZWD-L-M22C-M-G14-50-V-3AP4-5-R1
					1491862	VZWD-L-M22C-M-G14-50-V-1P4-5-R1
		6	0 ... 4	650	1491941	VZWD-L-M22C-M-G14-60-V-2AP4-4-R1
					1492019	VZWD-L-M22C-M-G14-60-V-3AP4-4-R1
					1491863	VZWD-L-M22C-M-G14-60-V-1P4-4-R1

Solenoid valves VZWD, directly actuated

Technical data – Stainless steel housing, nominal pressure PN 100

Ordering data – Solenoid valve VZWD						
	Process valve connection	Nominal size DN	Operating pressure [bar]	Product weight [g]	Stainless steel casting housing	
					Part No.	Type
	G $\frac{1}{8}$	1	0 ... 90	500	1491926	VZWD-L-M22C-M-G18-10-V-2AP4-90-R1
					1492004	VZWD-L-M22C-M-G18-10-V-3AP4-90-R1
					1491848	VZWD-L-M22C-M-G18-10-V-1P4-90-R1
		1.5	0 ... 85	500	1491927	VZWD-L-M22C-M-G18-15-V-2AP4-85-R1
					1492005	VZWD-L-M22C-M-G18-15-V-3AP4-85-R1
					1491849	VZWD-L-M22C-M-G18-15-V-1P4-85-R1
		2	0 ... 40	500	1491928	VZWD-L-M22C-M-G18-20-V-2AP4-40-R1
					1492006	VZWD-L-M22C-M-G18-20-V-3AP4-40-R1
					1491850	VZWD-L-M22C-M-G18-20-V-1P4-40-R1
		2.5	0 ... 22	500	1491929	VZWD-L-M22C-M-G18-25-V-2AP4-22-R1
					1492007	VZWD-L-M22C-M-G18-25-V-3AP4-22-R1
					1491851	VZWD-L-M22C-M-G18-25-V-1P4-22-R1
		3	0 ... 15	500	1491930	VZWD-L-M22C-M-G18-30-V-2AP4-15-R1
					1492008	VZWD-L-M22C-M-G18-30-V-3AP4-15-R1
					1491852	VZWD-L-M22C-M-G18-30-V-1P4-15-R1
		4	0 ... 8	500	1491931	VZWD-L-M22C-M-G18-40-V-2AP4-8-R1
					1492009	VZWD-L-M22C-M-G18-40-V-3AP4-8-R1
					1491853	VZWD-L-M22C-M-G18-40-V-1P4-8-R1
		5	0 ... 5	500	1491932	VZWD-L-M22C-M-G18-50-V-2AP4-5-R1
					1492010	VZWD-L-M22C-M-G18-50-V-3AP4-5-R1
					1491854	VZWD-L-M22C-M-G18-50-V-1P4-5-R1
		6	0 ... 4	500	1491933	VZWD-L-M22C-M-G18-60-V-2AP4-4-R1
					1492011	VZWD-L-M22C-M-G18-60-V-3AP4-4-R1
					1491855	VZWD-L-M22C-M-G18-60-V-1P4-4-R1